


Job Name:

Schedule Reference:

Date:

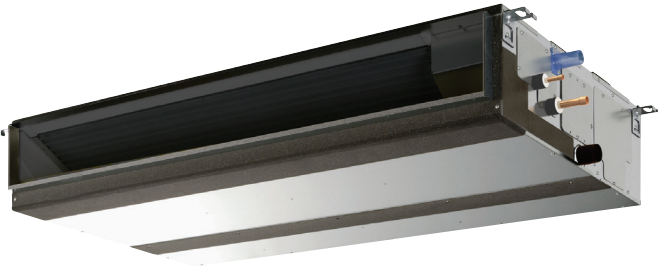

GENERAL FEATURES

- Dual set point functionality
- Multiple fan speed settings
- Auto fan mode
- 9-7/8" (250mm) high for low ceiling heights
- Built-in condensate lift; lifts to 27-9/16" (700 mm)
- Ducted fan coil supporting multiple configurations for flexible installation

OPTIONS

- ☐ External Heater Adapter.....CN24RELAY-KIT-CM3
- ☐ Filter Box (Includes 2" MERV 13 filter).....FBM2-2

SPECIFICATIONS

Capacity*

Cooling.....18,000 Btu/h
Heating.....20,000 Btu/h

Power

Power Source.....208 / 230V, 1-phase, 60Hz

Power Consumption

Cooling.....0.11 kW
Heating.....0.09 kW

Current

Cooling.....0.77 A
Heating.....0.66 A
Minimum Circuit Ampacity (MCA).....1.56 A
Maximum Overcurrent Protection (MOCP) Fuse.....15 A

External Finish.....Galvanized-steel Sheet

External Dimensions

Inches.....9-7/8 H x 35-7/16 W x 28-7/8 D
mm.....250 H x 900 W x 732 D

Net Weight.....58 lbs. / 26 kg

Coil Type.....Cross Fin
(Aluminum Plate Fin and Copper Tube)

Fan

Type x Quantity.....Sirocco Fan x 1
Airflow Rate (Low-Mid-High).....424 - 512 - 600 CFM
External Static Pressure.....0.14 - 0.20 - 0.28 - 0.40 - 0.60" WG
(External static pressure is factory set to 0.20" WG)
Motor Type.....DC Motor

Air Filter.....Polypropylene Honeycomb

Refrigerant Piping Dimensions

Liquid (High Pressure).....1/4" / 6.35 mm (Brazed)
Gas (Low Pressure).....1/2" / 12.7 mm (Brazed)

Drainpipe Dimension.....O.D. 1-1/4" / 32 mm

Sound Pressure Levels

Low-Mid-High.....28 - 32 - 35 dB(A)

* Cooling / Heating capacity indicated at the maximum value at operation under the following conditions:

Cooling | Indoor: 80° F (27° C) DB / 67° F (19° C) WB,

Cooling | Indoor: Outdoor 95° F (35° C) DB

Heating | Indoor: 70° F (21° C) DB,

Heating | Outdoor 47° F (8° C) DB / 43° F (6° C) WB

Notes:



3400 Lawrenceville Suwanee Rd
Suwanee, GA 30024
Tele: 678-376-2900 • Fax: 800-889-9904
Toll Free: 800-433-4822 (#4)
www.mitsubishipro.com
Specifications are subject to change without notice.